


BROOM + CURE

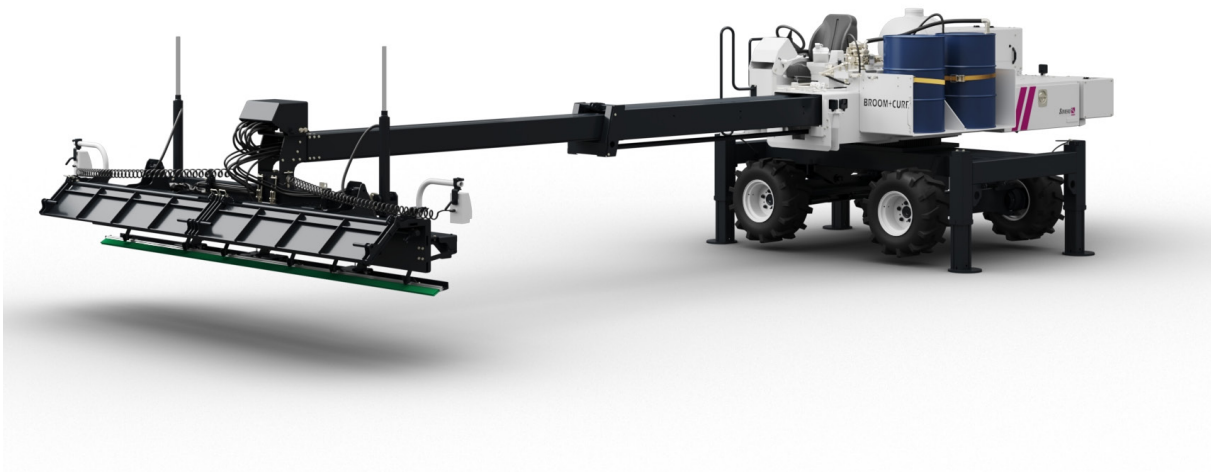

The new & improved **Broom + Cure Machine** takes problem of manual-application in the Bull floating, Brooming and Curing process and solves it with a machine-application. The newest feature - the bull float attachment - removes ridges in the concrete for paving projects and eliminates the need for manual labor to complete this process. The machine is built on a hybrid of a S-15R (upper) and S-22EZ (lower) frame, giving it the performance and power to tackle all your paving jobs.

**Automated Bull Floating. Consistent Broom Coverage. ACI Compliant Curing.
Every Time.**

**Contact us today at Sales@Somero.com / 1-239-210-6519
or visit SOMERO.COM to learn more!**

FEATURES/BENEFITS:

**denotes new standard features*

- > 14' proprietary broom, spray-bar head, and bull float – precision-engineering to follow ACI curing guidelines
- > Designed space for 55-gallon drums – integrated materials-handling to keep spraying consistent and refills easy
- > Dual Sonic Tracer – technology from the laser screed world to ensure accurate head height during the broom and cure process
- > Somero's® proprietary Soft Landing and Self-Leveling System
- > 16-Gallon freshwater tank and hose – capacity to guarantee easy clean-up and maintenance
- > Comes with a 1 Year Factory Warranty

SPECIFICATIONS:

| | |
|--------------------------|--|
| WEIGHT | 11,000 lbs / 4,990 kg |
| WIDTH | 7'3" / 2.21 m |
| HEIGHT | 7'4" / 2.24 m |
| LENGTH | 28' / 8.53 m |
| ENGINE (STANDARD) | Kubota D1803 Turbo 37.0 kW (49.6 HP) Tier 4 Diesel |
| BOOM LENGTH | 20' / 6.1 m |
| SCREED HEAD WIDTH | 14' 6" / 4.42 m |
| BROOM & BULL FLOAT WIDTH | 14" / 4.27 m |

**Engine options & requirements vary based on location. Contact Sales for more information.*

