

The compact boom screed has been ELECTRIFIED.  
Introducing the SRS-4e Laser Screed<sup>®</sup> Machine.



## Electric, Quality, Lightweight and Uniquely Feature Packed:

**Designed for Safety** – simple, clean, no-nonsense design gives 360° visibility

**Maneuverability** – 4 wheel drive with 3 selectable steering modes: 2-wheel, 4-wheel, and crab

**Easy Operation** – remote controlled from a walking or seated position

**Smoother Process** – strong 2 section roller boom with hydraulic grade adjustments

**Lighter Weight** – 4,800 lbs / 2,177 kg (without options)

Contact us today at [Sales@Somero.com](mailto:Sales@Somero.com) / 1-239-210-6519  
or visit [SOMERO.COM](http://SOMERO.COM) to learn more!

## FEATURES/BENEFITS:

- > Long Lasting, 3-Phase 48 VAC electric motor - whisper quiet, emission-less operation
- > 4-wheel drive for traction in any subgrade condition
- > Intelligent Steering uniquely rotates the tires to desired angle or direction for incredible maneuverability
- > Operator Selectable Steering includes 2-wheel, 4-wheel, and crab modes for the best maneuvering in any situation
- > Compact “no-nonsense” design with no lower frame saves weight, creates 360° visibility, thus improving worker safety
- > Utilizes the Somero® signature features such as Quick GradeSet System® for fast 1-person set up, QuickPass, Soft Landing, Column Block protection, Head Self-Level-System, and more to maximize efficiency and quality with every pass
- > Conveniences include LED work lights, LCD display with build in diagnostics, choice of turf or lugged tires, independent auger and vibrator adjustability
- > Compatible with Somero® 3-D Profiler System®
- > Industry accredited Training via Somero Concrete Institute; Self-study LMS program with 24x7 access; and On-site options


## SPECIFICATIONS:

WEIGHT	4,800 lbs / 2,177 kg (Without Options)
WIDTH	6'3" / 1.91 m
HEIGHT	5'5" / 1.64 m
LENGTH	14'9" / 4.50 m (Transport mode)
ENGINE (STANDARD)	Vanguard 48V, 7kWh batteries (QTY 4)
BOOM LENGTH	18' / 5.48 m
SCREED HEAD WIDTH STANDARD	11'4" / 3.45 m
VIBRATOR WIDTH	10' / 3.05 m



## OPTIONS:

- Tool Box / Storage Kit
- Somero® 3-D Profiler System®
- Pressure Washer Kit
- Operator Seat
- Silver or Gold Parts Kit

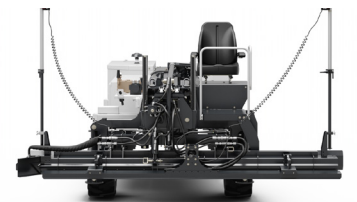

## IDEAL JOBS FOR THE SRS-4e:

Any Project Where Emissions Standards are a Factor -  
Cold Storage Rooms, Renovation on Occupied Space  
Grain Storage  
Medium-sized Distribution Centers  
Chicken Shed  
Manufacturing Facilities  
Slurry Pit  
Warehouses

