


STS-11M

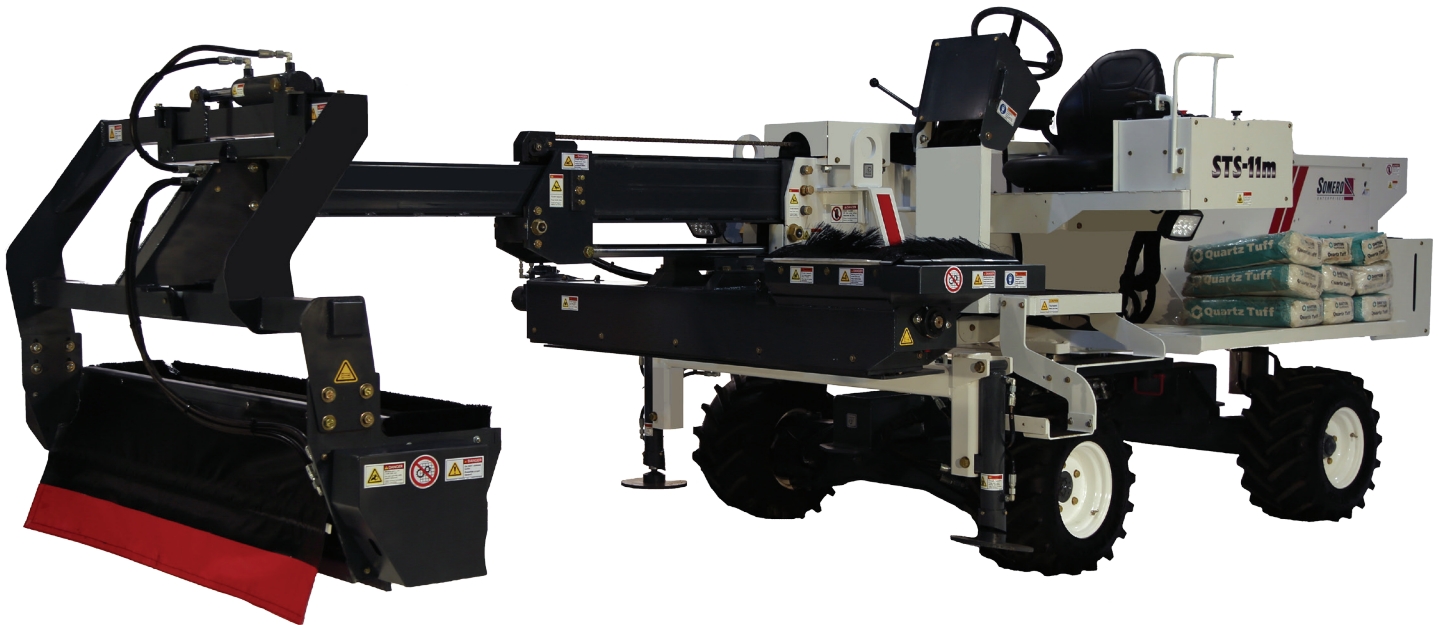

Disperse a wide variety of shake-on toppings with the **STS-11M** Topping Spreader. Its uniquely versatile design features a low dust loading technology with Inlet Hopper brushes, storage for up to twenty 50-lb. / 22.7 kg bags, and a compact machine size for easier transporting. The STS-11M Topping Spreader provides spreading accuracy that allows you to distribute shake-on toppings from fine materials to trap rock.

FEATURES/BENEFITS:

- > Increased profitability
- > Superior spreading accuracy
- > Easy to use
- > Improved operator visibility
- > Easy to maintain and service
- > Floor Levelness and Site Shape
- > On-Site training available
- > 2-Wheel, 4-Wheel, or Crab Steer

SPECIFICATIONS:

WEIGHT	9,000 lbs / 4,082 kg
WIDTH	7' 2" / 2.2 m
LENGTH	16' 3" / 4.9 m
ENGINE	35 HP / 26 kW Kubota Diesel
SELF-PROPELLED	Standard
SPREADER HEAD WIDTH	6' / 1.8 m

WHAT OUR CUSTOMERS SAY:

“The STS-11M improved the productivity and quality of the concrete team reducing labor cost and workers' fatigue. The optimized distribution of the hardener guaranteed a uniform and homogeneous layer. Besides the increase of productivity, the superior distribution of the aggregate increased our F numbers and reduced problems found with traditional methods. We are very pleased with Somero Enterprises STS-11M Topping Spreader.”

— Geremias Felipe Junior, **ALPHAPISO, Brazil**